


SAW Filter

FAR-F6KA-1G7475-D4CY

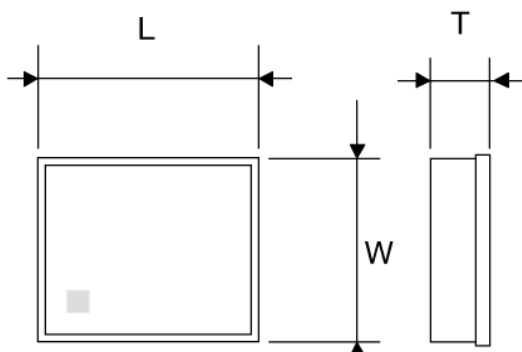

■ Features

- Item Summary
GSM / W-CDMA / LTE , Tx, 0504
- Lifecycle Stage
Mass Production
- Standard packaging quantity (minimum)
Taping Embossed 3000 , 15000pcs

■ Products characteristics table

Temperature Range	-30 to +85°C
Use	WCDMA / GSM / LTE
Transmitting / Receiving	Tx Filter
Insertion Loss	2.5dB
Attenuation	30dB
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow

■ External Dimensions

L	1.4mm +0.1:-0.1
W	1.0mm +0.1:-0.1
T	0.5mm max

2015.04.12

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.
 Before making final selection, please check product specification.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taiyo Yuden:

[FAR-F6KA-1G7475-D4CY-Z](#)